


colorPol[®] Polarizer

colorPol [®] MIR	
Spectral range	MIR
Wavelength range with contrast > 10 000 : 1 ⁽¹⁾	2000 to 4500 nm
Transmittance (uncoated)	> 65 % up to 90 %
Wavelength range with contrast > 1 000 : 1 ⁽¹⁾	1500 to 5000 nm
Transmittance (uncoated)	> 35 % up to 90 %
Filter thickness ⁽²⁾	200 ± 50 µm
Surface imperfections scratch / dig	60 / 40 (MIL-C-48497 A)
Acceptance angle	± 20°
Polarization axis	< 0.5° to indicated edge
Operating temperature	-50 to +400 °C
⁽¹⁾ contrast: ratio of parallel to perpendicular transmittance	
⁽²⁾ other thicknesses on request	
	Date: 12.01.2009

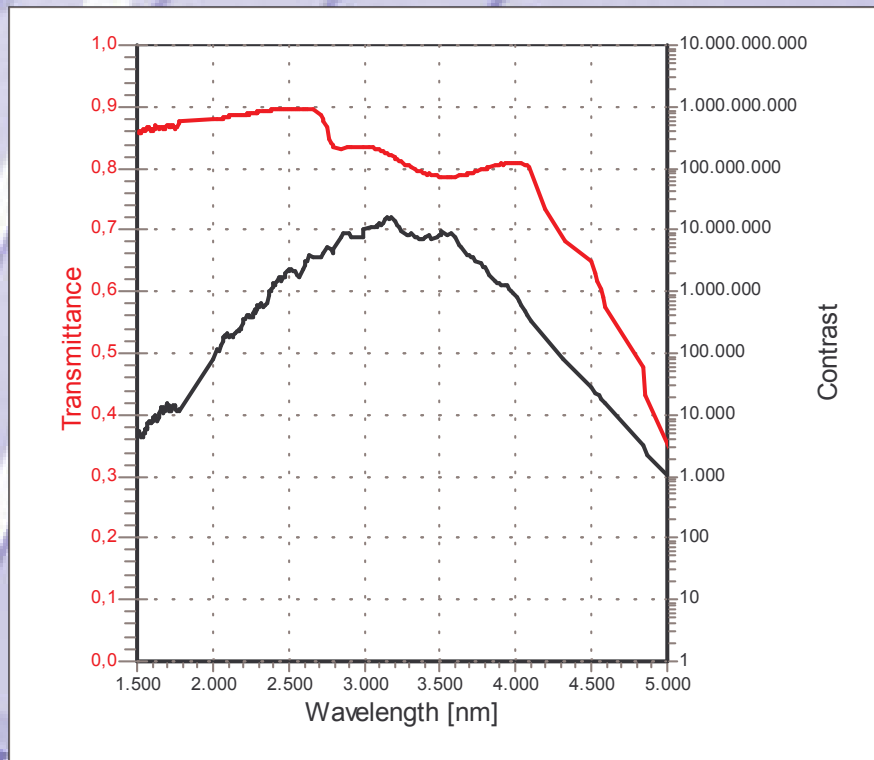

CODIXX AG

Steinfeldstraße 3
D-39179 Barleben
Germany

Phone: +49 39203 963 0
Fax: +49 39203 963 33
Email: colorpol@codixx.de
Internet: www.codixx.de

Version 1.4 – 10/23/2003