


# colorPol® Polarizer

## colorPol® NIR

Spectral range	NIR
Wavelength range with <b>contrast &gt; 10 000 : 1</b> <sup>(1)</sup>	1200 to 3000 nm
Wavelength range with <b>contrast &gt; 1 000 : 1</b> <sup>(1)</sup>	1000 to 3000 nm
Transmittance (uncoated) range 1000 - 2700 nm	> 77 %
Transmittance (uncoated) range 2700 - 3000 nm	> 70 %
Filter thickness <sup>(2)</sup>	250 ± 65 µm
Surface imperfections (scratch / dig)	60 / 40 (MIL-O-13830A)
Acceptance angle	± 20°
Polarization axis	< 0.5° to indicated edge
Operating temperature	-50 to +400 °C
<sup>(1)</sup> contrast: ratio of parallel to perpendicular transmittance	
<sup>(2)</sup> other thicknesses on request	
	Date: 04.11.2011

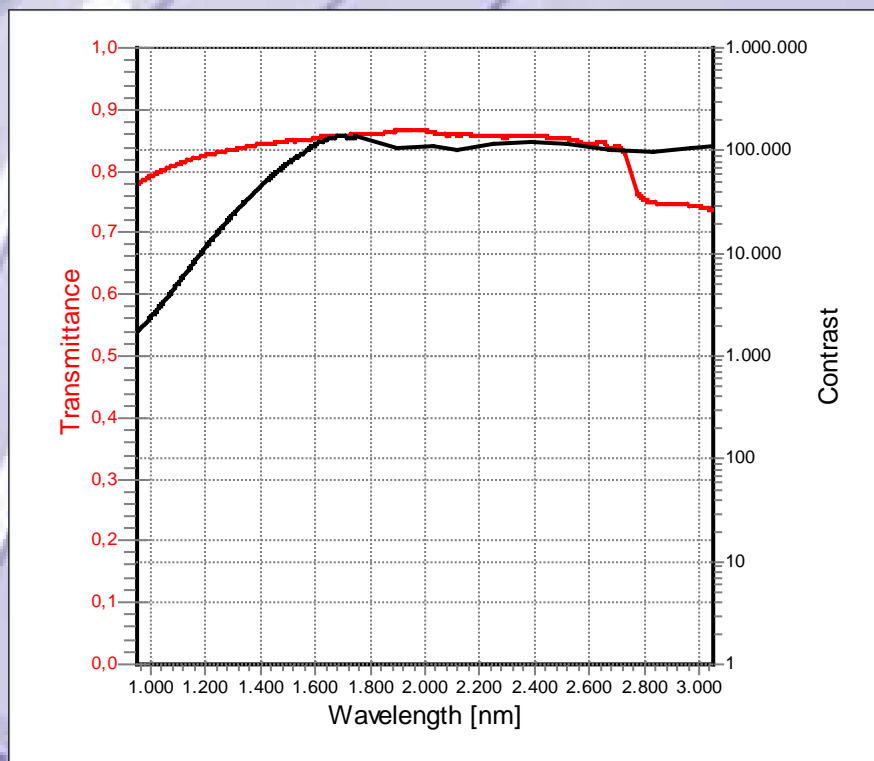

**CODIXX AG**

Steinfeldstraße 3  
D-39179 Barleben  
Germany

Phone: +49 39203 963 0  
Fax: +49 39203 963 33  
Email: colorpol@codixx.de  
Internet: www.codixx.de

Version 1.4 – 10/23/2003