


<b>glass sheet polarizer</b>	
<b>colorPol<sup>®</sup> VIS 500 BC3 002938</b>	
<b>linear VIS-polarizer</b>	Date: 21.07.2010

Wavelength range with **contrast > 1 000 : 1**  
(Contrast = ratio of parallel and perpendicular transmittance)  
Transmittance (uncoated)

475 to 625 nm  
> 55 % up to 81 %


Spectral response

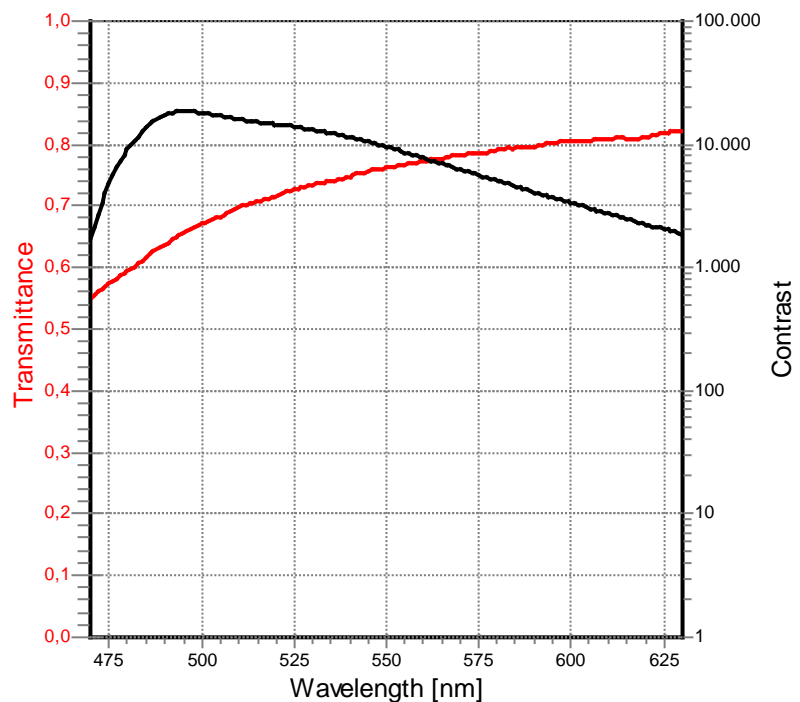

Filter thickness

280 ± 50 µm

Filter size



Clear aperture

90 % of surface dimension

Acceptance angle

± 20°

Operating temperature

-50 .. +400 °C