



colorPol® IR 1550N BC4 T2 HT

This narrowband polarizer was developed to match special needs of the popular laser wavelength 1550nm and covers 1550 ± 30 nm. colorPol® polarizers utilize dichroism of silver nanoparticles in glass to achieve superior contrast and durability.

Custom shapes, sizes and patterned structures are possible due to larger manufactured substrates. For assistance please contact your CODIXX Sales Engineer or one of the local distributors with your custom requirements.

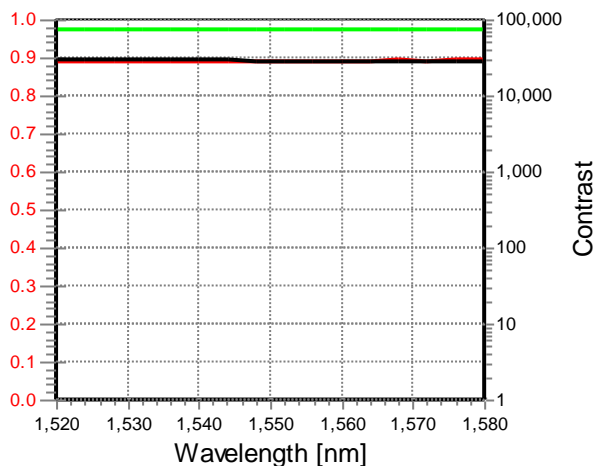

Typical contrast (black) and transmittance (uncoated red, with AR-coating C1550 green) for un laminated parts

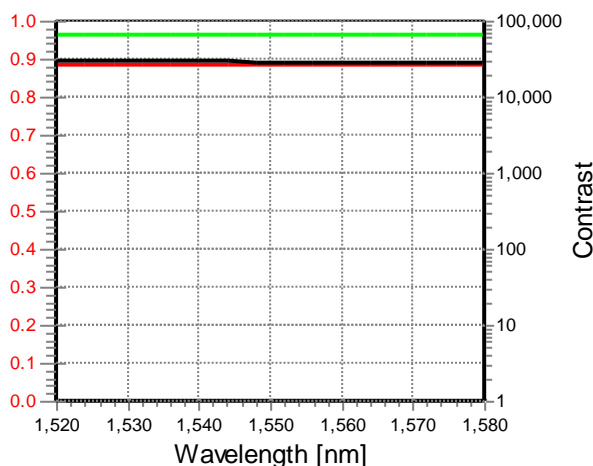

Typical contrast (black) and transmittance (uncoated red, with AR-coating C1550 green) for laminated parts

Key Benefits

- Transmittance typically greater than 97 % with antireflection (AR) coating
- Contrast ratio greater than 10,000 : 1
- Ideal for applications using lasers with center wavelength at 1550 nm
- Customization
- Highly durable

Applications

- Free space isolators operating at 1550 nm
- Optical communication
- LIDAR
- Polarization mode dispersion (PMD) measurement
- Molecular spectroscopic measurement
- NIR spectroscopy

Specifications colorPol® IR 1550N BC4 T2 HT

	unlaminated	laminated
Spectral range	NIR	
Wavelength range with contrast > 10,000 : 1 ⁽¹⁾	1 550 ± 30 nm	
Transmittance uncoated	> 88 %	> 87 %
with AR-coating C1550	> 96 %	> 95 %
with 1 side AR-coating CS1550	> 92 %	> 91 %
Filter thickness ⁽²⁾	200 ± 50 µm	1.7 ± 0.2 mm ⁽³⁾ 2.0 ± 0.2 mm ⁽⁴⁾
Acceptance angle (coating reference for 0°)	± 20°	
Accuracy of polarization axis to edge	< 0.5°	
Usual surface quality (MIL-O-13830A: Scratch / Dig) ⁽⁵⁾	40 / 20	
Operating temperature	-50 to +400 °C	-20 to +120 °C
Transmitted wavefront distortion at 633 nm over an inspection area of Ø10 mm	< 3 λ	< λ/4 ⁽⁴⁾
Recommended safe operation limit		
Laser damage threshold		
Continuous block	10 W/cm ²	1 W/cm ²
Continuous pass	25 W/cm ²	5 W/cm ²
Pulse peak power	12 MW/cm ²	1 MW/cm ²
Equivalent pulse power density	1 µJ/cm ²	100 nJ/cm ²

⁽¹⁾ contrast: ratio of parallel to perpendicular transmittance

⁽²⁾ other thicknesses on request

⁽³⁾ laminated

⁽⁴⁾ laminated, ground and polished

⁽⁵⁾ other specifications available on request

Issued: 30/04/2018

Version: 1.01

